



25.08.2026, 04:15:04 UTC

SCHAEFFLER




YRTCM150-XL

Axial/radial roller bearing

Axial/radial bearings, double direction, screw mounting, with integrated angular measuring system

Informacje techniczne

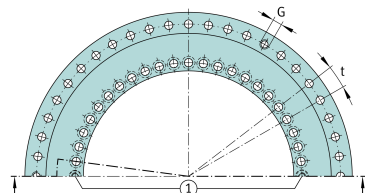

Twoja aktualna wersja produktu

Main Dimensions & Performance Data

d	150 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,013 mm	Bore diameter lower tolerance
D	240 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0,015 mm	Outside diameter lower tolerance
H	41 mm	Height
C _r	74.000 N	Basic dynamic load rating, radial
C _{0r}	146.000 N	Basic static load rating, radial
C _a	128.000 N	Basic dynamic load rating, axial
C _{0a}	650.000 N	Basic static load rating, axial
n _G	800 1/min	Limiting speed
M _R	4 Nm	Bearing friction torque at 5 1/min
≈m	5,5 kg	Masa



Mounting dimensions

J	165 mm	Pitch circle diameter fixing holes in inner ring
J 1	225 mm	Pitch circle diameter fixing holes in outer ring
d 1	7 mm	Fixing holes diameter inner ring
d 2	11 mm	Counterbore diameter of fixing holes
a	6,2 mm	Counterbore depth of fixing holes
	34	Quantity of fixing holes inner ring
d 3	7 mm	Fixing holes diameter outer ring
	33	Quantity of fixing holes outer ring
n	36	Pitch quantity
t	10 °	Pitch separation angle
G	M8	Threaded extraction hole
	3	Quantity of threaded extraction hole
M A	14 Nm	Screw tightening torque
	2	Quantity of retaining screws

t 1 3 µm Axial and radial runout, measurement standard; Measured on mounted bearing, with ideal adjacent construction.

Dimensions

H 1	27 mm	Height contact face outer ring
	0,03 mm	Height contact face outerring H1 upper tolerance
	-0,03 mm	Height contact face outerring H1 lower tolerance
H 2	14 mm	Height contact face outer ring
	0,02 mm	Height contact face outerring H2 upper tolerance
	-0,02 mm	Height contact face outerring H2 lower tolerance
H M	10 mm	Height shaft washer
D 1 max	214,5 mm	Maximum diameter inner ring
D M	213,82 mm	Diameter of dimensional scale on shaft locating washer
C	12 mm	Width of outer ring



Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Additional information

c _{aL}	7.600 N/μm	Axial rigidity of bearing position
c _{rL}	4.480 N/μm	Radial rigidity of bearing position
c _{kL}	30.300 Nm/mrad	Tilting rigidity of bearing position
c _{aW}	12.000 N/μm	Axial rigidity of rolling element set
c _{rW}	6.500 N/μm	Radial rigidity of rolling element set
c _{kW}	61.000 Nm/mrad	Tilting rigidity of rolling element set

Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Momenty względem wszystkich osi
-  Smarowanie smarem
-  Bez uszczelnienia