

ZARF1560-TV

Needle roller/axial cylindrical roller bearing

Needle roller/axial cylindrical roller bearings
ZARF, double direction, for screw mounting

Informacje techniczne

Twoja aktualna wersja produktu





Cage	TV	Plastic Cage made from PA66
------	----	-----------------------------

Main Dimensions & Performance Data

d	15 mm	Bore diameter
D	60 mm	Outside diameter
H	40 mm	Height
C _a	24.900 N	Basic dynamic load rating, axial
C _{0a}	53.000 N	Basic static load rating, axial
C _r	13.000 N	Basic dynamic load rating, radial
C _{0r}	17.500 N	Basic static load rating, radial
C _{ua}	7.500 N	Fatigue load limit, axial
C _{ur}	2.650 N	Fatigue load limit, radial
n _{G Oil}	8.500 1/min	Limiting speed for oil lubrication
n _{G Grease}	2.200 1/min	Limiting speed for grease lubrication
M _{RL}	0,35 Nm	Bearing friction torque
≈m	0,379 kg	Masa


Mounting dimensions

D _{a max}	36 mm	Maximum diameter of housing shoulder
d _{a min}	28 mm	Minimum diameter shaft shoulder
t ₁	0,1 mm	Position bore in the housing

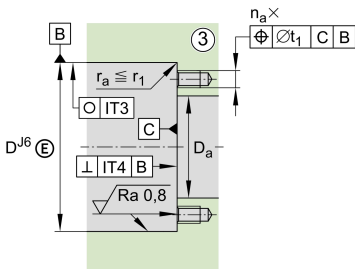



24.08.2026, 23:51:02 UTC



Dimensions

H ₁	26 mm	Height outer ring over wave washer
C	14 mm	Width, outer ring
C ₁	8 mm	Distance to lubrication hole
D ₁	35 mm	Rip diameter shaft washer
B	7,5 mm	Width inner ring
r _{min}	0,3 mm	Minimum chamfer dimension
r _{1 min}	0,6 mm	Minimum chamfer dimension
d ₁	3,2 mm	Diameter lubrication hole
J	46 mm	Pitch circle diameter (holes)
n	6	Number of screwing holes
n x t	60 °	Split

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.



Additional information

c_{aL}	1.400 N/ μ m	Rigidity axial
c_{kL}	110 Nm/mrad	Tilting stiffness
M_m	0,24 kg*cm2	Mass moment of inertia
	1 μ m	Axial runout
radial	ZMA15/33	Recommended INA precision locknut for radial locking (not included)
axial	AM15	Recommended INA precision locknut for axial locking (not included)
M_A	10 Nm	Tightening torque nut
	6.506 N	Required locknut force
	M6	Screw size
n_a	6	Number of screws
na x ta	60 °	Division (screwing holes)

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Obciążenie osiowe dwukierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia