






ZARF45105-L-TV

Needle roller/axial cylindrical roller bearing

Needle roller/axial cylindrical roller bearings  
ZARF.-L, double direction, for screw  
mounting, long shaft locating washer

Informacje techniczne

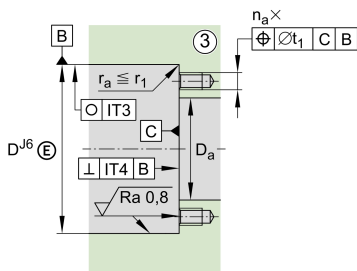


Twoja aktualna wersja produktu

|                                          |    |                                                       |
|------------------------------------------|----|-------------------------------------------------------|
| Cage                                     | TV | Plastic Cage made from PA66                           |
| Locating Feature , bearing<br>outer ring | L  | Stepped shaft locating washer extended<br>on one side |

Main Dimensions & Performance Data

|                       |             |                                       |
|-----------------------|-------------|---------------------------------------|
| d                     | 45 mm       | Bore diameter                         |
| D                     | 105 mm      | Outside diameter                      |
| H                     | 75 mm       | Hight                                 |
| C <sub>a</sub>        | 61.000 N    | Basic dynamic load rating, axial      |
| C <sub>0a</sub>       | 177.000 N   | Basic static load rating, axial       |
| C <sub>r</sub>        | 38.000 N    | Basic dynamic load rating, radial     |
| C <sub>0r</sub>       | 74.000 N    | Basic static load rating, radial      |
| C <sub>ua</sub>       | 15.500 N    | Fatigue load limit, axial             |
| C <sub>ur</sub>       | 10.400 N    | Fatigue load limit, radial            |
| n <sub>G Oil</sub>    | 4.000 1/min | Limiting speed for oil lubrication    |
| n <sub>G Grease</sub> | 1.500 1/min | Limiting speed for grease lubrication |
| M <sub>RL</sub>       | 1,2 Nm      | Bearing friction torque               |
| ≈m                    | 1,664 kg    | Masa                                  |



Mounting dimensions

|         |        |                                      |
|---------|--------|--------------------------------------|
| D a max | 71 mm  | Maximum diameter of housing shoulder |
| d a min | 54 mm  | Minimum diameter shaft shoulder      |
| t 1     | 0,2 mm | Position bore in the housing         |

Dimensions

|         |         |                                    |
|---------|---------|------------------------------------|
| H 1     | 55 mm   | Height outer ring over wave washer |
| C       | 22,5 mm | Width, outer ring                  |
| C 1     | 12,5 mm | Distance to lubrication hole       |
| D 1     | 70 mm   | Rip diameter shaft washer          |
| D 2     | 56 mm   | Heeldiameter wave washer long      |
| D 3     | 68 mm   | Outside diameter wave washer long  |
| B       | 11,5 mm | Width, wave washer                 |
| B 1     | 26,5 mm | Width wave washer long             |
| B 2     | 13 mm   | Width heel wave washer long        |
| r min   | 0,3 mm  | Minimum chamfer dimension          |
| r 1 min | 0,6 mm  | Minimum chamfer dimension          |
| d 1     | 6 mm    | Diameter lubrication hole          |
| J       | 85 mm   | Pitch circle diameter (holes)      |
| n       | 8       | Number of screwing holes           |
| n x t   | 45 °    | Splīt                              |

Temperature range

|       |        |                            |
|-------|--------|----------------------------|
| T min | -30 °C | Operating temperature min. |
| T max | 120 °C | Operating temperature max. |



Additional information

|                  |                  |                                                                     |
|------------------|------------------|---------------------------------------------------------------------|
| $c_{aL}$         | 3.000 N/ $\mu$ m | Rigidity axial                                                      |
| $c_{kL}$         | 1.340 Nm/mrad    | Tilting stiffness                                                   |
| $M_m$            | 6,03 kg*cm2      | Mass moment of inertia                                              |
|                  | 1 $\mu$ m        | Axial runout                                                        |
| radial           | ZMA45/68         | Recommended INA precision locknut for radial locking (not included) |
| axial            | AM45             | Locknut 2                                                           |
| $M_A$            | 65 Nm            | Tightening torque nut                                               |
|                  | 15.112 N         | Preload force axial                                                 |
|                  | 56X70X8          | Sealing ring                                                        |
|                  | M8               | Screw size                                                          |
| $n_a$            | 8                | Number of screws                                                    |
| $n_a \times t_a$ | 45 °             | Division (screwing holes)                                           |

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Obciążenie osiowe dwukierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia