


**ZARF50115-L-TV**

Needle roller/axial cylindrical roller bearing

Needle roller/axial cylindrical roller bearings
ZARF..-L, double direction, for screw
mounting, long shaft locating washer

Informacje techniczne

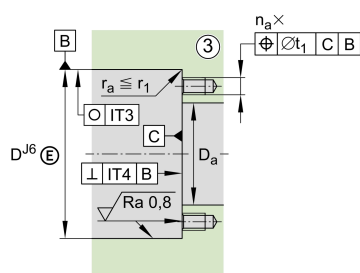



Twoja aktualna wersja produktu

Cage	TV	Plastic Cage made from PA66
Locating Feature , bearing outer ring	L	Stepped shaft locating washer extended on one side

Main Dimensions & Performance Data

d	50 mm	Bore diameter
D	115 mm	Outside diameter
H	78 mm	Hight
C _a	90.000 N	Basic dynamic load rating, axial
C _{0a}	300.000 N	Basic static load rating, axial
C _r	40.000 N	Basic dynamic load rating, radial
C _{0r}	82.000 N	Basic static load rating, radial
C _{ua}	28.000 N	Fatigue load limit, axial
C _{ur}	11.500 N	Fatigue load limit, radial
n _G Oil	3.600 1/min	Limiting speed for oil lubrication
n _G Grease	1.200 1/min	Limiting speed for grease lubrication
M _{RL}	2,2 Nm	Bearing friction torque
≈m	2,022 kg	Masa



Mounting dimensions

D _a max	79 mm	Maximum diameter of housing shoulder
d _a min	58 mm	Minimum diameter shaft shoulder
t ₁	0,2 mm	Position bore in the housing

Dimensions

H ₁	58 mm	Height outer ring over wave washer
C	22,5 mm	Width, outer ring
C ₁	12,5 mm	Distance to lubrication hole
D ₁	78 mm	Rip diameter shaft washer
D ₂	60 mm	Heeldiameter wave washer long
D ₃	78 mm	Outside diameter wave washer long
B	11,5 mm	Width, wave washer
B ₁	29,5 mm	Width wave washer long
B ₂	14 mm	Width heel wave washer long
r _{min}	0,3 mm	Minimum chamfer dimension
r ₁ min	0,6 mm	Minimum chamfer dimension
d ₁	6 mm	Diameter lubrication hole
J	94 mm	Pitch circle diameter (holes)
n	12	Number of screwing holes
n x t	30 °	Splīt

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.



Additional information

c_{aL}	4.800 N/ μ m	Rigidity axial
c_{kL}	2.470 Nm/mrad	Tilting stiffness
M_m	10,46 kg*cm2	Mass moment of inertia
	1 μ m	Axial runout
radial	ZMA50/75	Recommended INA precision locknut for radial locking (not included)
axial	AM50	Locknut 2
M_A	85 Nm	Tightening torque nut
	18.410 N	Preload force axial
	60X80X8	Sealing ring
	M8	Screw size
n_a	12	Number of screws
na x ta	30 °	Division (screwing holes)

Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia