**ZARF55145-TV**

Needle roller/axial cylindrical roller bearing

Needle roller/axial cylindrical roller bearings
ZARF, double direction, for screw mounting

Informacje techniczne

Twoja aktualna wersja produktu





Cage	TV	Plastic Cage made from PA66
------	----	-----------------------------


Main Dimensions & Performance Data

d	55 mm	Bore diameter
D	145 mm	Outside diameter
H	82 mm	Height
C _a	177.000 N	Basic dynamic load rating, axial
C _{0a}	500.000 N	Basic static load rating, axial
C _r	44.000 N	Basic dynamic load rating, radial
C _{0r}	98.000 N	Basic static load rating, radial
C _{ua}	46.500 N	Fatigue load limit, axial
C _{ur}	13.800 N	Fatigue load limit, radial
n _{G Oil}	2.900 1/min	Limiting speed for oil lubrication
n _{G Grease}	1.000 1/min	Limiting speed for grease lubrication
M _{RL}	4 Nm	Bearing friction torque
≈m	4,086 kg	Masa

Mounting dimensions

D _{a max}	101 mm	Maximum diameter of housing shoulder
d _{a min}	85 mm	Minimum diameter shaft shoulder
t ₁	0,2 mm	Position bore in the housing

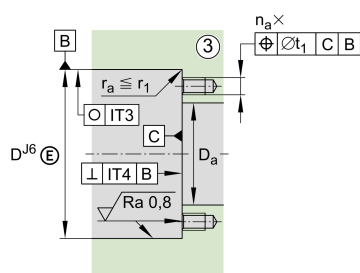



Dimensions

H ₁	51 mm	Height outer ring over wave washer
C	22,5 mm	Width, outer ring
C ₁	12,5 mm	Distance to lubrication hole
D ₁	100 mm	Rip diameter shaft washer
B	17,5 mm	Width inner ring
r _{min}	0,3 mm	Minimum chamfer dimension
r _{1 min}	0,6 mm	Minimum chamfer dimension
d ₁	6 mm	Diameter lubrication hole
J	118 mm	Pitch circle diameter (holes)
n	12	Number of screwing holes
n x t	30 °	Split

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.



Additional information

c_{aL}	4.900 N/ μ m	Rigidity axial
c_{kL}	3.600 Nm/mrad	Tilting stiffness
M_m	36,1 kg*cm2	Mass moment of inertia
	1 μ m	Axial runout
radial	ZMA55/98	Recommended INA precision locknut for radial locking (not included)
axial	AM55	Recommended INA precision locknut for axial locking (not included)
M_A	220 Nm	Tightening torque nut
	39.807 N	Required locknut force
	M10	Screw size
n_a	12	Number of screws
na x ta	30 °	Division (screwing holes)

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Obciążenie osiowe dwukierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia