
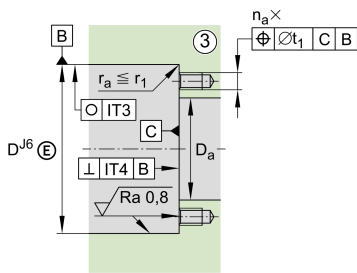



ZARF90210-L-TV

Needle roller/axial cylindrical roller bearing

Needle roller/axial cylindrical roller bearings
ZARF..-L, double direction, for screw
mounting, long shaft locating washer

Informacje techniczne





Twoja aktualna wersja produktu

Cage	TV	Plastic Cage made from PA66
Locating Feature , bearing outer ring	L	Stepped shaft locating washer extended on one side

Main Dimensions & Performance Data

d	90 mm	Bore diameter
D	210 mm	Outside diameter
H	135 mm	Hight
C _a	325.000 N	Basic dynamic load rating, axial
C _{0a}	1.030.000 N	Basic static load rating, axial
C _r	98.000 N	Basic dynamic load rating, radial
C _{0r}	210.000 N	Basic static load rating, radial
C _{ua}	95.000 N	Fatigue load limit, axial
C _{ur}	29.000 N	Fatigue load limit, radial
n _{G Oil}	1.800 1/min	Limiting speed for oil lubrication
n _{G Grease}	700 1/min	Limiting speed for grease lubrication
M _{RL}	10,5 Nm	Bearing friction torque
≈m	15,076 kg	Masa



Mounting dimensions

D a max	161 mm	Maximum diameter of housing shoulder
d a min	125 mm	Minimum diameter shaft shoulder
t 1	0,4 mm	Position bore in the housing

Dimensions

H 1	94,5 mm	Height outer ring over wave washer
C	32 mm	Width, outer ring
C 1	17,5 mm	Distance to lubrication hole
D 1	160 mm	Rip diameter shaft washer
D 2	130 mm	Heeldiameter wave washer long
D 3	158 mm	Outside diameter wave washer long
B	22,5 mm	Width, wave washer
B 1	47,5 mm	Width wave washer long
B 2	18 mm	Width heel wave washer long
r min	0,3 mm	Minimum chamfer dimension
r 1 min	1 mm	Minimum chamfer dimension
d 1	8 mm	Diameter lubrication hole
J	180 mm	Pitch circle diameter (holes)
n	16	Number of screwing holes
n x t	22,5 °	Split

Temperature range

T min	-30 °C	Operating temperature min.
T max	120 °C	Operating temperature max.



Additional information

c_{aL}	7.700 N/ μ m	Rigidity axial
c_{kL}	14.500 Nm/mrad	Tilting stiffness
M_m	372 kg*cm2	Mass moment of inertia
	2 μ m	Axial runout
radial	ZMA90/155	Recommended INA precision locknut for radial locking (not included)
axial	AM90	Locknut 2
M_A	960 Nm	Tightening torque nut
	100.669 N	Preload force axial
	130X160X12	Sealing ring
	M12	Screw size
n_a	16	Number of screws
na x ta	22,5 °	Division (screwing holes)

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Obciążenie osiowe dwukierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia