




ZKLDF100

Axial angular contact ball bearing

Axial angular contact ball bearings ZKLDF, double direction, for screw mounting, sealing shields on both sides

Informacje techniczne

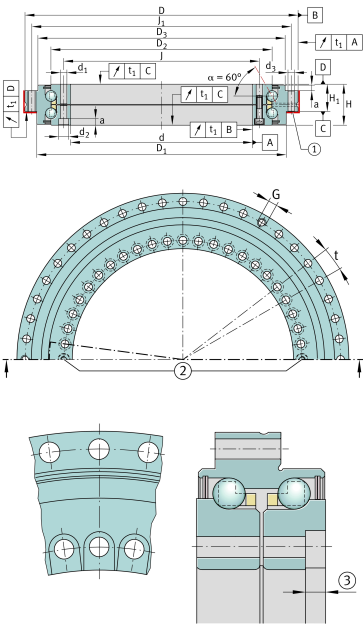

Twoja aktualna wersja produktu

Generation B

Main Dimensions & Performance Data

d	100 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,01 mm	Bore diameter lower tolerance
D	185 mm	Flange diameter
	0 mm	Flange diameter upper tolerance
	-0,015 mm	Flange diameter lower tolerance
H	38 mm	Height
n _G	5.000 1/min	Limiting speed
C _a	71.000 N	Basic dynamic load rating, axial
C _{0a}	265.000 N	Basic static load rating, axial
C _{ua}	10.300 N	Fatigue load limit, axial
≈m	3,84 kg	Masa



Mounting dimensions

J	112 mm	Pitch circle diameter fixing holes in inner ring
J ₁	170 mm	Pitch circle diameter fixing holes in outer ring
d ₁	5,6 mm	Fixing holes diameter inner ring
d ₂	10 mm	Counterbore diameter of fixing holes
a	5,4 mm	Counterbore depth of fixing holes
	16	Quantity of fixing holes inner ring
d ₃	5,6 mm	Fixing holes diameter outer ring
	15	Quantity of fixing holes outer ring
n	18	Pitch quantity
t	20 °	Pitch separation angle
G	M5	Threaded extraction hole
	3	Quantity of threaded extraction hole
M _A	8,5 Nm	Screw tightening torque
	2	Quantity of retaining screws

Dimensions

H ₁	25 mm	Height contact face outer ring
	0,175 mm	Height contact face outerring H1 upper tolerance
	-0,175 mm	Height contact face outerring H1 lower tolerance
D ₁	161 mm	Outside diameter D1
D ₂	136 mm	Rib diameter inner ring
D ₃	158 mm	Outside diameter D3
t ₁	3 µm	Axial and radial runout, measurement standard; Measured on mounted bearing, with ideal adjacent construction.

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.



Additional information

c_{aL}	1.200 N/ μ m	Axial rigidity of bearing position
c_{rL}	350 N/ μ m	Radial rigidity of bearing position
c_{kL}	3.600 Nm/mrad	Tilting rigidity of bearing position
c_{aL}	2.200 N/ μ m	Axial rigidity of rolling element set
c_{rW}	350 N/ μ m	Radial rigidity of rolling element set
c_{kW}	5.000 Nm/mrad	Tilting rigidity of rolling element set

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Obciążenie osiowe dwukierunkowe
- 

Momenty względem wszystkich osi
- 

Smarowanie dożywotnie, bezobsługowe
- 

Smarowanie smarem
- 

Uszczelnienie dwustronne