




ZKLDF460

Axial angular contact ball bearing

Axial angular contact ball bearings ZKLDF, double direction, for screw mounting, sealing shields on both sides

Informacje techniczne

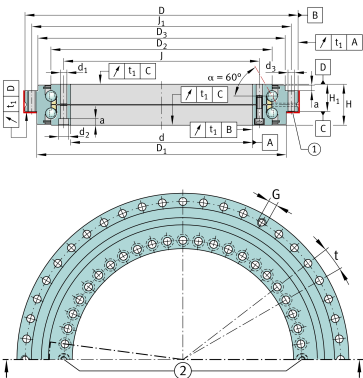

Twoja aktualna wersja produktu

Generation B

Main Dimensions & Performance Data

d	460 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,023 mm	Bore diameter lower tolerance
D	600 mm	Flange diameter
	0 mm	Flange diameter upper tolerance
	-0,028 mm	Flange diameter lower tolerance
H	70 mm	Height
n _G	1.400 1/min	Limiting speed
C _a	255.000 N	Basic dynamic load rating, axial
C _{0a}	1.860.000 N	Basic static load rating, axial
C _{ua}	37.000 N	Fatigue load limit, axial
≈m	46,2 kg	Masa



Mounting dimensions

J	482 mm	Pitch circle diameter fixing holes in inner ring
J 1	580 mm	Pitch circle diameter fixing holes in outer ring
d 1	9,3 mm	Fixing holes diameter inner ring
d 2	15 mm	Counterbore diameter of fixing holes
a	8,2 mm	Counterbore depth of fixing holes
	46	Quantity of fixing holes inner ring
d 3	9,3 mm	Fixing holes diameter outer ring
	45	Quantity of fixing holes outer ring
n	48	Pitch quantity
t	7,5 °	Pitch separation angle
G	M12	Threaded extraction hole
	3	Quantity of threaded extraction hole
M A	34 Nm	Screw tightening torque
	2	Quantity of retaining screws

Dimensions

H 1	46 mm	Height contact face outer ring
	0,225 mm	Height contact face outerring H1 upper tolerance
	-0,225 mm	Height contact face outerring H1 lower tolerance
D 1	560 mm	Outside diameter D1
D 2	520 mm	Rib diameter inner ring
D 3	563 mm	Outside diameter D3

t 1	6 µm	Axial and radial runout, measurement standard; Measured on mounted bearing, with ideal adjacent construction.
-----	------	---

Temperature range

T min	-30 °C	Operating temperature min.
T max	120 °C	Operating temperature max.



Additional information

c _{aL}	5.300 N/μm	Axial rigidity of bearing position
c _{rL}	1.100 N/μm	Radial rigidity of bearing position
c _{kL}	175.000 Nm/mrad	Tilting rigidity of bearing position
c _{aL}	7.100 N/μm	Axial rigidity of rolling element set
c _{rW}	1.100 N/μm	Radial rigidity of rolling element set
c _{kW}	223.000 Nm/mrad	Tilting rigidity of rolling element set

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Obciążenie osiowe dwukierunkowe
- 

Momenty względem wszystkich osi
- 

Smarowanie dożywotnie, bezobsługowe
- 

Smarowanie smarem
- 

Uszczelnienie dwustronne
- 

Łożysko gabarytowe