



25.08.2026, 01:15:05 UTC



SCHAEFFLER

ZKLR0828-2Z

Flanged housing unit

Angular contact ball bearing units ZKLR...-2Z,
double direction, for screw mounting, gap
seals on both sides

Informacje techniczne

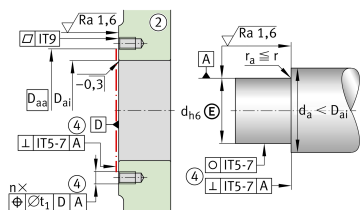

Twoja aktualna wersja produktu

Main Dimensions & Performance Data

d	8 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,008 mm	Bore diameter lower tolerance
D	23,9 mm	Outside diameter bearing pot
	0,03 mm	Outside diameter bearing pot upper tolerance
	-0,01 mm	Outside diameter bearing pot lower tolerance
B	14 mm	Width, inner ring
	0,25 mm	Inner ring width upper tolerance
	-0,25 mm	Inner ring width lower tolerance
C _r	5.000 N	Basic dynamic load rating, radial
C _{0r}	2.700 N	Basic static load rating, radial
C _a	2.060 N	Basic dynamic load rating, axial
C _{0a}	1.850 N	Basic static load rating, axial
C _{ur}	142 N	Fatigue load limit, radial
M _{RL}	0,08 Nm	Bearing friction torque
m	35,698 g	Masa

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje



Mounting dimensions

d _a	10,4 mm	Diameter shaft shoulder
D _{ai}	18 mm	Support diameter outer ring inside
D _{aa min}	22 mm	Minimum support diameter outer ring outside
	M4	Screw size
n	4	Number of screws
	M6	Screw size b
n	2	Number of screws b
t ₁	0,2 mm	Position bore in the housing

Dimensions

d ₁	11 mm	Rib diameter inner ring
r _{min}	0,3 mm	Minimum chamfer dimension
d ₂	4,5 mm	Fixing boring diameter
A ₁	28 mm	Flange width
A ₂	35 mm	Height flange
b	6,6 mm	Wide fixing groove
m	26 mm	Bore distance height
n	20 mm	Bore distance width
M	35 mm	Distance fixing groove
H	15,5 mm	Height housing
	0 mm	Height housing upper tolerance
	-0,5 mm	Height housing lower tolerance



Additional information

c _{aL}	16 N/μm	Rigidity axial
M _m	0,003 kg*cm2	Mass moment of inertia
	7 μm	Axial runout
	ZM08	Locknut 1
M _A	4 Nm	Tightening torque nut