



FAG


32034-X-XL-P5

Tapered roller bearing

Tapered roller bearings 320, main dimensions
acc. to DIN 720, separable

X-life

Informacje techniczne

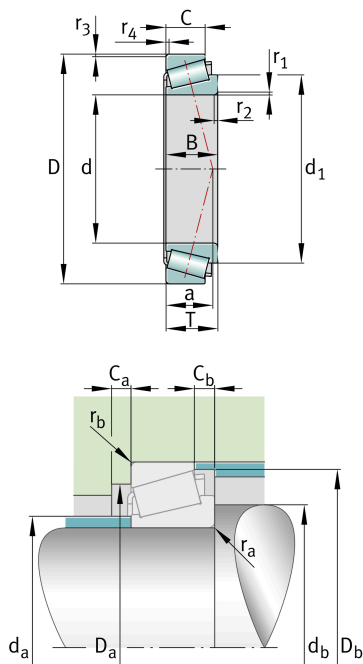

Twoja aktualna wersja produktu

Tolerance class	P5	Class 5 (ISO 492:2023)
Heat treatment	Standard	
Cage	Standard	Sheet steel cage, window cage, roller-guided
Quality level	XL	X-life
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	170 mm	Bore diameter
D	260 mm	Outside diameter
B	57 mm	Width, inner ring
C	43 mm	Width, outer ring
T	57 mm	Width, total
C _r	630.000 N	Basic dynamic load rating, radial
C _{0r}	880.000 N	Basic static load rating, radial
C _{ur}	121.000 N	Fatigue load limit, radial
n _G	3.050 1/min	Limiting speed
n _{gr}	1.690 1/min	Thermal speed rating
≈m	10,5 kg	Masa



Mounting dimensions

$d_{a \max}$	187 mm	Maximum diameter of shaft shoulder
$d_{b \min}$	182 mm	Minimum diameter of shaft shoulder
$D_{a \min}$	230 mm	Minimum diameter of housing shoulder
$D_{a \max}$	248 mm	Maximum diameter of housing shoulder
$D_{b \min}$	249 mm	Minimum diameter of housing shoulder
$C_{a \min}$	10 mm	Minimum axial space
$C_{b \min}$	14 mm	Minimum axial space
$r_{a \max}$	3 mm	Maximum fillet radius of shaft
$r_{b \max}$	2,5 mm	Maximum fillet radius of housing

Dimensions

$r_{1, 2 \min}$	3 mm	Minimum chamfer dimension of inner ring back face
$r_{3, 4 \min}$	2,5 mm	Minimum chamfer dimension of outer ring back face
a	57 mm	Distance between the apexes of the pressure cones
d_1	214,5 mm	Guidance rib diameter of inner ring

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	200 °C	Operating temperature max.

Calculation factors

e	0,44	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y	1,35	Dynamic axial load factor
Y_0	0,74	Static axial load factor

Additional information

T4EC170

Comparative designation to ISO 10317 and ISO 355



Właściwości



Obciążenie promieniowe



Obciążenie osiowe jednokierunkowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia