



FAG


32218-XL-S1

Tapered roller bearing

Tapered roller bearings 322, main dimensions
acc. to DIN 720, separable

X-life

Informacje techniczne

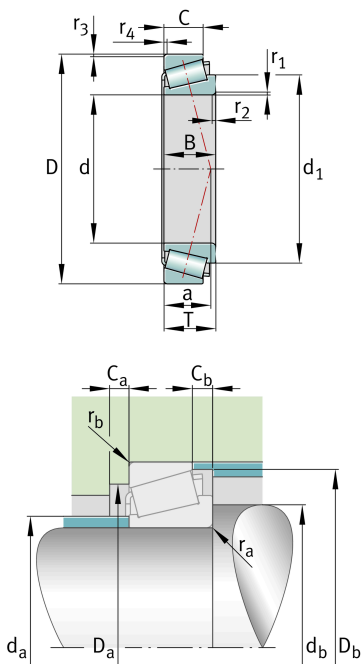

Twoja aktualna wersja produktu

Tolerance class	PN	Normal (ISO 492:2023)
Heat treatment	S1	Rings dimensional stabilized up to 200°
Cage	Standard	Sheet steel cage, window cage, roller-guided
Internal design	Standard	
Quality level	XL	X-life
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	90 mm	Bore diameter
D	160 mm	Outside diameter
B	40 mm	Width, inner ring
C	34 mm	Width, outer ring
T	42,5 mm	Width, total
C _r	310.000 N	Basic dynamic load rating, radial
C _{0r}	360.000 N	Basic static load rating, radial
C _{ur}	56.000 N	Fatigue load limit, radial
n _G	5.300 1/min	Limiting speed
n _{gr}	2.850 1/min	Thermal speed rating
m	3,41 kg	Masa



Mounting dimensions

d a max	102 mm	Maximum diameter of shaft shoulder
d b min	100 mm	Minimum diameter of shaft shoulder
D a min	138 mm	Minimum diameter of housing shoulder
D a max	150 mm	Maximum diameter of housing shoulder
D b min	152 mm	Minimum diameter of housing shoulder
C a min	5 mm	Minimum axial space
C b min	8,5 mm	Minimum axial space
r a max	2,5 mm	Maximum fillet radius of shaft
r b max	2 mm	Maximum fillet radius of housing

Dimensions

r 1, 2 min	2,5 mm	Minimum chamfer dimension of inner ring back face
r 3, 4 min	2 mm	Minimum chamfer dimension of outer ring back face
a	36 mm	Distance between the apexes of the pressure cones
d 1	122,1 mm	Guidance rib diameter of inner ring

Temperature range

T min	-30 °C	Operating temperature min.
T max	200 °C	Operating temperature max.

Calculation factors

e	0,42	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y	1,43	Dynamic axial load factor
Y 0	0,79	Static axial load factor

Additional information

T3FC090	Comparative designation to ISO 10317 and ISO 355
---------	--



Właściwości



Obciążenie promieniowe



Obciążenie osiowe jednokierunkowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia