




FAG

HS7017-E-T-P4S-UL

High speed spindle bearing

High speed spindle bearing HS70...-E, adjusted, in pairs or sets, contact angle $\alpha = 25^\circ$, restricted tolerances

Informacje techniczne

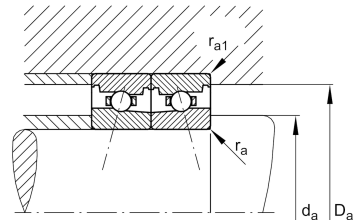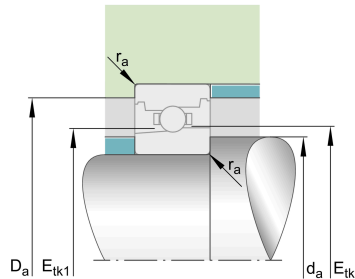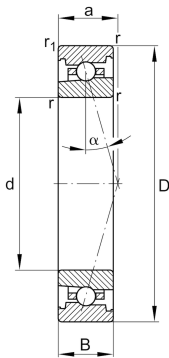

Twoja aktualna wersja produktu

Contact angle	E	Contact angle 25°
Sealing	Without	Not sealed
Cage	T	Laminated fabric cage
Tolerance class	P4S	Tolerance class P4S, FAG standard better than P4 to ISO 492:2023
Arrangement bearing set	U	Single bearing
Preload class	L	Preload light

Main Dimensions & Performance Data

d	85 mm	Bore diameter
D	130 mm	Outside diameter
B	22 mm	Width
C _r	29.000 N	Basic dynamic load rating, radial
C _{0r}	21.400 N	Basic static load rating, radial
C _{ur}	2.190 N	Fatigue load limit, radial
n _G Grease	13.000 1/min	Limiting speed for grease lubrication
n _G Oil	20.000 1/min	Limiting speed for oil lubrication
n _G	20.000 1/min	Limiting speed
≈m	0,837 kg	Masa



Mounting dimensions

d_a	93 mm	Diameter shaft shoulder
d_a	h12	Diameter shaft shoulder clearance
D_a	122 mm	Shoulder diameter outer ring
D_a	H12	Shoulder diameter outer ring clearance
$r_{a \max}$	1 mm	Maximum recess radius
$r_{a1 \max}$	0,6 mm	Maximum recess radius
$E_{tk \min}$	102,3 mm	Minimum diameter injection pitch
$E_{tk \max}$	104,7 mm	Maximum diameter injection pitch
$E_{tk1 \min}$	99 mm	Minimum diameter injection pitch
$E_{tk1 \max}$	104,7 mm	Maximum diameter injection pitch
a	36,1 mm	Distance between the apexes of the pressure cones

Dimensions

$r_{\min}$	1,1 mm	Minimum chamfer dimension
$r_{1 \min}$	1,1 mm	Minimum chamfer dimension
α	25 °	Contact angle

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	100 °C	Operating temperature max.



Additional information

F_{VL}	173 N	Preload force light
F_{VM}	518 N	Preload force medium
F_{VH}	1.035 N	Preload force heavy
K_{aEL}	497 N	Lift-off force light
K_{aEM}	1.520 N	Lift-off force medium
K_{aEH}	3.099 N	Lift-off force heavy
c_{aL}	151 N/μm	Axial rigidity light
c_{aM}	224 N/μm	Axial rigidity medium
c_{aH}	292 N/μm	Axial rigidity heavy

Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia