




FAG

KL68149-L68110

Tapered roller bearing

Tapered roller bearings K-Series, in inch sizes, separable

Informacje techniczne

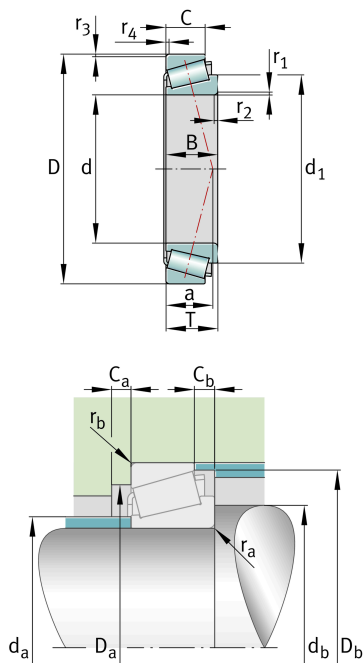

Twoja aktualna wersja produktu

|                 |          |                                              |
|-----------------|----------|----------------------------------------------|
| Tolerance class | ABMA4    | Class 4 (ANSI/ABMA 19.2:2013)                |
| Heat treatment  | Standard |                                              |
| Cage            | Standard | Sheet steel cage, window cage, roller-guided |
| Quality level   | Standard |                                              |
| Number of rows  | 1        | Single-row design                            |

Main Dimensions & Performance Data

|                 |              |                                   |
|-----------------|--------------|-----------------------------------|
| d               | 34,988 mm    | Bore diameter                     |
| D               | 59,131 mm    | Outside diameter                  |
| B               | 16,764 mm    | Width, inner ring                 |
| C               | 11,938 mm    | Width, outer ring                 |
| T               | 15,875 mm    | Width, total                      |
| C <sub>r</sub>  | 34.000 N     | Basic dynamic load rating, radial |
| C <sub>0r</sub> | 44.500 N     | Basic static load rating, radial  |
| C <sub>ur</sub> | 5.100 N      | Fatigue load limit, radial        |
| n <sub>G</sub>  | 12.400 1/min | Limiting speed                    |
| n <sub>gr</sub> | 7.100 1/min  | Thermal speed rating              |
| ≈m              | 170,07 g     | Masa                              |



### Mounting dimensions

|              |         |                                      |
|--------------|---------|--------------------------------------|
| $d_{a \max}$ | 39 mm   | Maximum diameter of shaft shoulder   |
| $d_{b \min}$ | 45,5 mm | Minimum diameter of shaft shoulder   |
| $D_{a \min}$ | 53 mm   | Minimum diameter of housing shoulder |
| $D_{a \max}$ | 53 mm   | Maximum diameter of housing shoulder |
| $D_{b \min}$ | 56 mm   | Minimum diameter of housing shoulder |
| $C_{a \min}$ | 3 mm    | Minimum axial space                  |
| $C_{b \min}$ | 4 mm    | Minimum axial space                  |
| $r_{a \max}$ | 3,6 mm  | Maximum fillet radius of shaft       |
| $r_{b \max}$ | 1,3 mm  | Maximum fillet radius of housing     |

### Dimensions

|                 |         |                                                   |
|-----------------|---------|---------------------------------------------------|
| $r_{1, 2 \min}$ | 3,6 mm  | Minimum chamfer dimension of inner ring back face |
| $r_{3, 4 \min}$ | 1,3 mm  | Minimum chamfer dimension of outer ring back face |
| $a$             | 13 mm   | Distance between the apexes of the pressure cones |
| $d_1$           | 48,8 mm | Guidance rib diameter of inner ring               |

### Temperature range

|            |        |                            |
|------------|--------|----------------------------|
| $T_{\min}$ | -30 °C | Operating temperature min. |
| $T_{\max}$ | 120 °C | Operating temperature max. |

### Calculation factors

|       |      |                                                                                      |
|-------|------|--------------------------------------------------------------------------------------|
| $e$   | 0,42 | Limiting value of $F_a/F_r$ for the applicability of diff. Values of factors X and Y |
| $Y$   | 1,44 | Dynamic axial load factor                                                            |
| $Y_0$ | 0,79 | Static axial load factor                                                             |



### Właściwości



Obciążenie promieniowe



Obciążenie osiowe jednokierunkowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia