




RASEY40-TV-VA-HLA

Plummer block housing unit

Plummer block housing unit RASEY..-TV-VA,  
RIBB plastic

Informacje techniczne

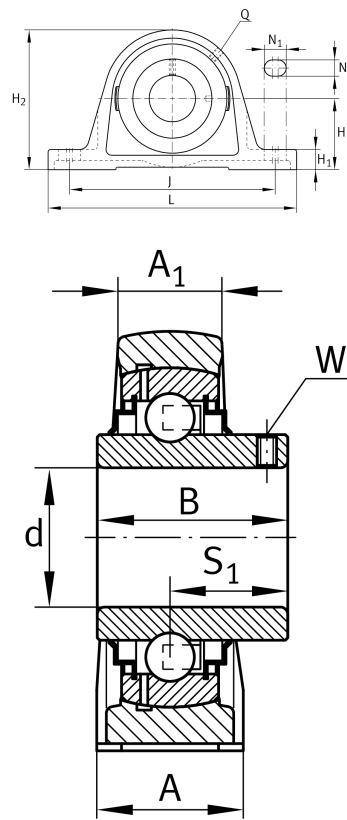

Twoja aktualna wersja produktu

|                             |    |                               |
|-----------------------------|----|-------------------------------|
| Special material            | TV | Plastic housing               |
| Corrosion resistant bearing | VA | Corrosion-resistant VA design |
| Material                    | TV | Plastic                       |

Main Dimensions & Performance Data

|     |          |               |
|-----|----------|---------------|
| d   | 40 mm    | Bore diameter |
| L   | 184 mm   | Length        |
| H 2 | 99 mm    | Height        |
| ≈m  | 0,953 kg | Masa          |

Mounting dimensions

|     |        |                      |
|-----|--------|----------------------|
| J   | 137 mm | Distance fixing bore |
| N   | 14 mm  | Width (slot)         |
| N 1 | 18 mm  | Length (slot)        |

Dimensions

|     |              |                                    |
|-----|--------------|------------------------------------|
| H   | 49,2 mm      | Distance shaft axis                |
| A   | 54 mm        | Width (base)                       |
| H 1 | 19,5 mm      | Height (base)                      |
| B   | 49,2 mm      | Width                              |
| S 1 | 30,2 mm      | Distance raceway to locking collar |
| Q   | 1/4 - 28 UNF | Connection thread for lubrication  |



Additional information

|                          |                     |
|--------------------------|---------------------|
| GEH.ASE08-TV             | Housing             |
| GYE40-KRR-B-FA107-VA-HLA | Bearing designation |
| KASK08-S-G               | End cap             |
| KASK08-S-R-NBR           | Open protecting cap |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 100 °C | Operating temperature max. |