




YRTS460

Axial/radial roller bearing

Axial/radial bearings YRTS, double direction,
for screw mounting, for higher speeds

Informacje techniczne

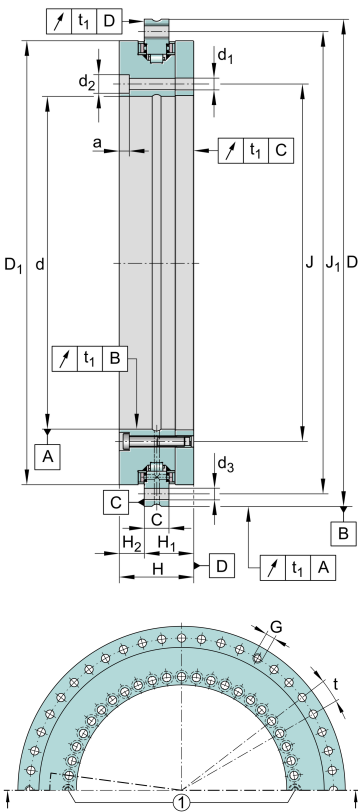

Twoja aktualna wersja produktu

Angular measuring system
integrated No

Main Dimensions & Performance Data

d	460 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,023 mm	Bore diameter lower tolerance
D	600 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0,028 mm	Outside diameter lower tolerance
H	70 mm	Height
C _r	168.000 N	Basic dynamic load rating, radial
C _{0r}	570.000 N	Basic static load rating, radial
C _a	221.000 N	Basic dynamic load rating, axial
C _{0a}	1.690.000 N	Basic static load rating, axial
n _G	560 1/min	Limiting speed
m	45,2 kg	Masa



Mounting dimensions

J	482 mm	Pitch circle diameter fixing holes in inner ring
J 1	580 mm	Pitch circle diameter fixing holes in outer ring
d 1	9,3 mm	Fixing holes diameter inner ring
d 2	15 mm	Counterbore diameter of fixing holes
a	8,2 mm	Counterbore depth of fixing holes
	46	Quantity of fixing holes inner ring
d 3	9,3 mm	Fixing holes diameter outer ring
	45	Quantity of fixing holes outer ring
n	48	Pitch quantity
t	7,5 °	Pitch separation angle
G	M12	Threaded extraction hole
	3	Quantity of threaded extraction hole
M A	34 Nm	Screw tightening torque
	2	Quantity of retaining screws
t 1	6 µm	Axial and radial runout, measurement standard; Measured on mounted bearing, with ideal adjacent construction.

Dimensions

H 1	46 mm	Height contact face outer ring
	0,07 mm	Height contact face outerring H1 upper tolerance
	-0,08 mm	Height contact face outerring H1 lower tolerance
H 2	24 mm	Height contact face outer ring
D 1 max	560,9 mm	Maximum diameter inner ring
C	22 mm	Width of outer ring

Temperature range

T min	-30 °C	Operating temperature min.
T max	120 °C	Operating temperature max.



Additional information

c _{aL}	16.000 N/μm	Axial rigidity of bearing position
c _{rL}	7.200 N/μm	Radial rigidity of bearing position
c _{kL}	504.000 Nm/mrad	Tilting rigidity of bearing position
c _{aW}	25.400 N/μm	Axial rigidity of rolling element set
c _{rW}	9.500 N/μm	Radial rigidity of rolling element set
c _{kW}	843.000 Nm/mrad	Tilting rigidity of rolling element set
M _m	7.379 kg*cm2	Mass moment of inertia for rotating outer ring
M _m	15.738 kg*cm2	Mass moment of inertia for rotating inner ring

Właściwości

- Obciążenie promieniowe
- Obciążenie osiowe jednokierunkowe
- Obciążenie osiowe dwukierunkowe
- Momenty względem wszystkich osi
- Smarowanie smarem
- Bez uszczelnienia
- Łożysko gabarytowe