

ZARF75185-TV

Needle roller/axial cylindrical roller bearing

Needle roller/axial cylindrical roller bearings
ZARF, double direction, for screw mounting

Informacje techniczne

Twoja aktualna wersja produktu





Cage	TV	Plastic Cage made from PA66
------	----	-----------------------------


Main Dimensions & Performance Data

d	75 mm	Bore diameter
D	185 mm	Outside diameter
H	100 mm	Hight
C _a	290.000 N	Basic dynamic load rating, axial
C _{0a}	890.000 N	Basic static load rating, axial
C _r	81.000 N	Basic dynamic load rating, radial
C _{0r}	132.000 N	Basic static load rating, radial
C _{ua}	85.000 N	Fatigue load limit, axial
C _{ur}	19.100 N	Fatigue load limit, radial
n _{G Oil}	2.100 1/min	Limiting speed for oil lubrication
n _{G Grease}	700 1/min	Limiting speed for grease lubrication
M _{RL}	8 Nm	Bearing friction torque
≈m	8,716 kg	Masa

Mounting dimensions

D _{a max}	136 mm	Maximum diameter of housing shoulder
d _{a min}	113 mm	Minimum diameter shaft shoulder
t ₁	0,4 mm	Position bore in the housing

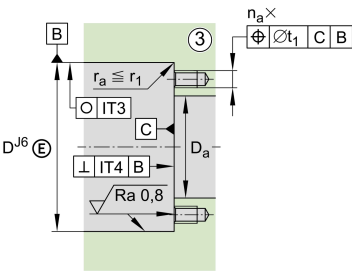



Dimensions

H ₁	62 mm	Height outer ring over wave washer
C	27 mm	Width, outer ring
C ₁	15 mm	Distance to lubrication hole
D ₁	135 mm	Rip diameter shaft washer
B	21 mm	Width inner ring
r _{min}	0,3 mm	Minimum chamfer dimension
r _{1 min}	1 mm	Minimum chamfer dimension
d ₁	6 mm	Diameter lubrication hole
J	155 mm	Pitch circle diameter (holes)
n	12	Number of screwing holes
n x t	30 °	Split

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.



Additional information

c_{aL}	6.600 N/ μ m	Rigidity axial
c_{kL}	8.500 Nm/mrad	Tilting stiffness
M_m	149 kg*cm2	Mass moment of inertia
	2 μ m	Axial runout
radial	ZMA75/125	Recommended INA precision locknut for radial locking (not included)
axial	AM75	Recommended INA precision locknut for axial locking (not included)
M_A	580 Nm	Tightening torque nut
	72.971 N	Required locknut force
	M12	Screw size
n_a	12	Number of screws
na x ta	30 °	Division (screwing holes)

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Obciążenie osiowe dwukierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia